


Job Name:

System Reference:

Date:

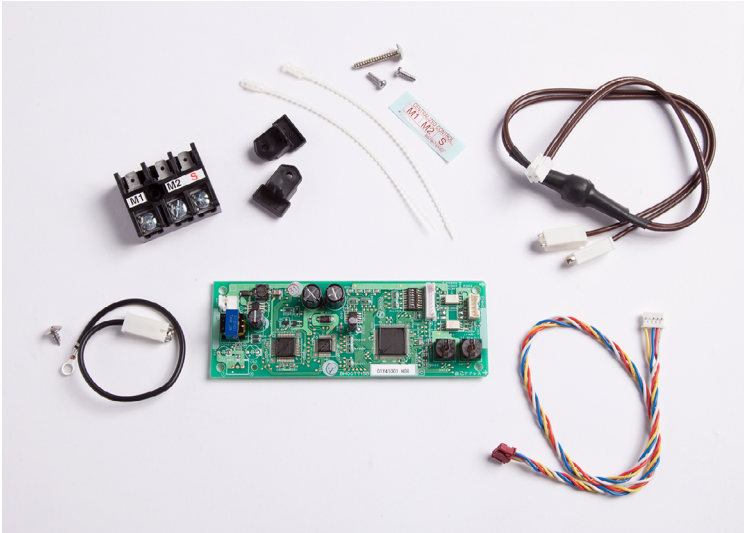

SPECIFICATIONS


This product is used for connecting the MXZ-3C/4C/5C\*\*NA and MXZ-2C/3C\*\*NA models to M-NET

- Contains rotary switches for M-NET head address setting
- Dip switches indicate attached indoor units

Power	Supplied from outdoor unit
Power consumption	0.8 W (at 30 VDC)
Operating conditions	Mounted inside the electrical utility box of outdoor unit. (Temperature: -20 to 60° F, humidity: 90% or less (no condensation))
Weight	0.3 kg
M-NET power consumption coefficient	1

DIMENSIONS

Units: In. [mm]

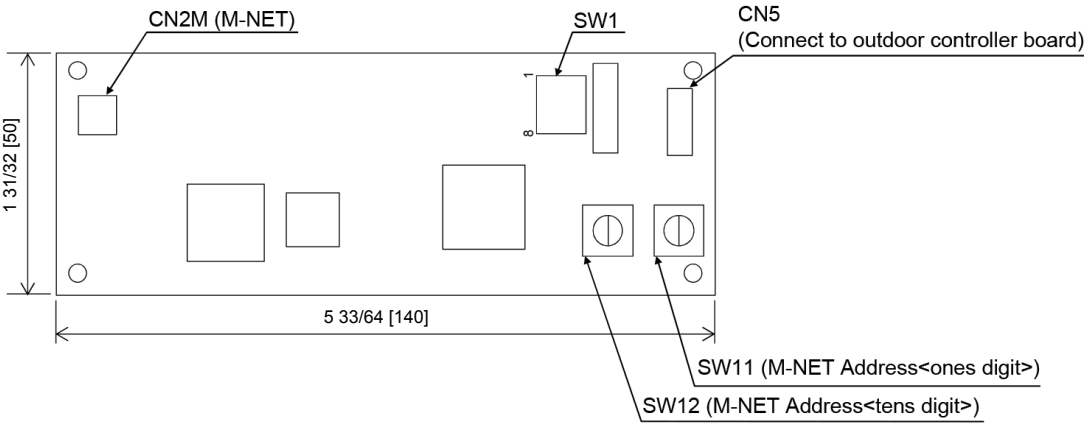


COMPATIBILITY CHART

Group	Applicable model
A:	MXZ-3C24NA MXZ-3C30NA MXZ-4C36NA
B:	MXZ-2C20NAHZ MXZ-3C24NAHZ MXZ-3C30NAHZ MXZ-5C42NA

# MODEL: PAC-IF01MNT-E WIRING DIAGRAM

## Caution for wiring

- ① Never supply voltage 208V-230VAC to the terminals for M-NET transmission. If the voltage is supplied, it can break the electronic parts on the M-NET board.
  - ② Use the shielded cable (CVVS, CPEVS, MVVS) of 1.25mm<sup>2</sup> (AWG 16) with 2 wires (polarity is not a concern) for the transmission cable.  
Never use transmit wires of different system with a cable which contains multi wires.  
The communication of transmit signals will not work properly and it can cause wrong operation.
  - ③ The power consumption coefficient<sup>※1</sup> of the M-NET board is "1".
- ※1 "Power consumption coefficient" is a coefficient to calculate the relative power consumption of the devices that receive power through the M-NET transmission cable.

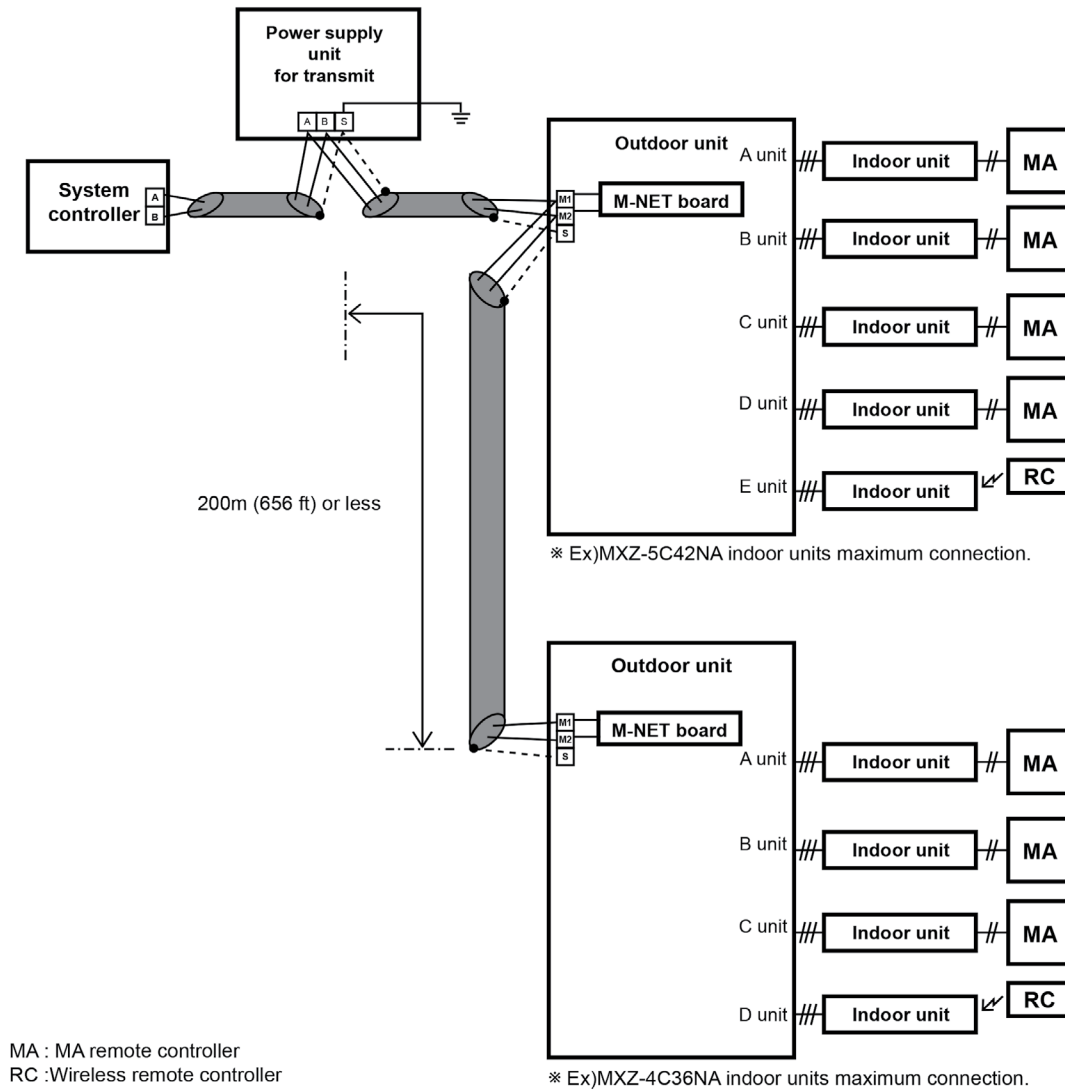

COOLING & HEATING

1340 Satellite Boulevard, Suwanee, GA 30024  
Toll Free: 800-433-4822 www.mehvac.com