


System Reference:

(controller)

Date:

MITSUBISHI



(receiver)

PAR-SL100A-E (controller) SPECIFICATIONS:

- Hand-held remote controller for use with PAR-SF9FA-E signal receiver
- Compatible with M-Series model SLZ-KF**NA(.TH)
- Compatible with CITY MULTI model PLFY-P**NFMU-E
- · Requires one controller per indoor unit
- · Weekly timer, one per day, ON/OFF
- Individual vane settings
- · Dual set point control on PLFY Model
- Direct and Indirect Airflow function
- For use with 3D i-see Sensor[™]

PAR-SF9FA-E (receiver) SPECIFICATIONS:

- Signal receiver for use with PAR-SL100A-E remote controller
- Compatible with M-Series model SLZ-KF**NA(.TH)
- Compatible with CITY MULTI model PLFY-P**NFMU-E
- Requires one receiver per indoor unit
- For use with 3D i-see sensor
- CN90 connection


Functions	Button	Liquid crystal
OFF / ON	① OFF/ON	
Preset temperature		88 .5
Mode	MODE	Cool Dry Heat Fan Auto Dual set point function
Fan speed	FAN Se	4-Speed Auto
Vane angle	VANE M	5-step Swing Auto
3D i-see Sensor	i-see 	Image: Second se
Send sign		
Battery replacement sign		
Function setting		(FUNCTION)
Test run		TEST
Self check		CHECK)
Not available		N/A

Controller Basic Functions


*Functions available may vary according to the model.

Model: PAR-SL100A-E Controller and PAR-SF9FA-E Receiver


Dimensions mm[In.]:



PAR-SL100A-E



System Example

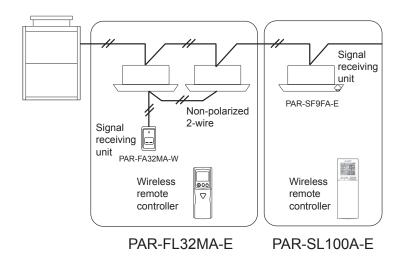



COOLING & HEATING

1340 Satellite Boulevard. Suwanee, GA 30024 Toll Free: 800-433-4822 www.mehvac.com



© 2019 Mitsubishi Electric Trane HVAC US, LLC