

Job Name:

Schedule Reference:

Date:




LONWORKS® INTERFACE LMAP04U SPECIFICATIONS

- Connects up to 50 units (CITY MULTI and/or LOSSNAY)
- Operation/Setting
 - All Off (Emergency Stop)
 - On/Off
 - Set point (connected equipment dependent):
 - Dual set point:
 - > Cool
 - > Heat
 - Setback Mode:
 - > High Limit
 - > Low Limit
 - Single set point
 - Fan Speed
 - Local Prohibit:
 - On/Off
 - Mode
 - Set point
 - Collective Local Prohibit
 - Forced Thermostat OFF
 - Filter Sign Reset
 - Time Stamp
 - Limit Temperature Setting Range
 - LOSSNAY Mode:
 - On/Off
 - Mode
 - Fan Speed
- Measuring/Monitoring State
 - Emergency
 - On/Off
 - Collective On/Off
 - Mode
 - Set point (connected equipment dependent):
 - Dual set point:
 - > Cool
 - > Heat
 - Setback Mode:
 - > High Limit
 - > Low Limit
 - Single set point
 - Fan Speed
 - Local Prohibit:
 - On/Off
 - Mode
 - Set point
 - Collective Local Prohibit
 - Forced Thermostat OFF
 - Filter Run Time
 - Temperature:
 - Space
 - Water
 - Defrost
 - Group Number
 - Alarm
 - Collective Alarm:
 - Indoor Unit
 - LM Adapter
 - Error:
 - Code
 - Unit Address
 - Thermostat On/Off
 - LOSSNAY Mode:
 - On/Off
 - Mode
 - Fan Speed
- Dimensions: 13-7/16 x 14-3/16 x 2-3/8 in. (340 x 360 x 59.6 mm)
- Net Weight: 7.5 lbs. (3.4 kg)
- Power Source: 60Hz, 208 / 230V
- Net Weight: 7.5 lbs. (3.4 kg)
- Power Source: 60Hz, 208 / 230V

Notes:


Model: LMAP04U - SYSTEM EXAMPLES / DIMENSIONS

SYSTEM EXAMPLES

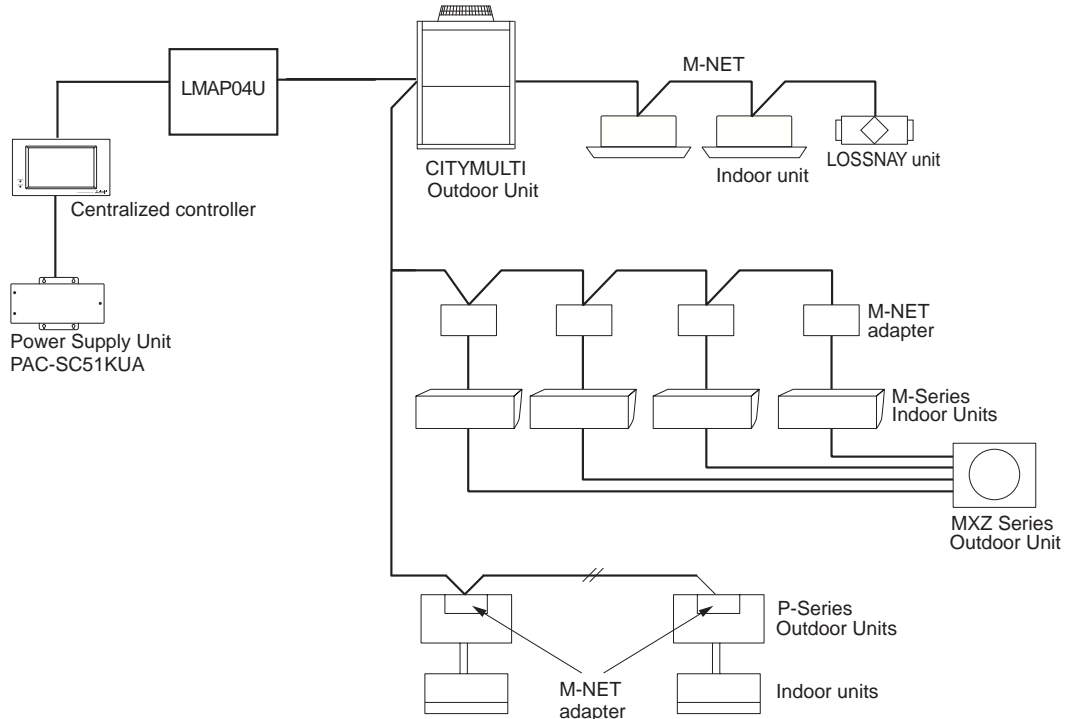

DIMENSIONS

Unit: mm [in.]

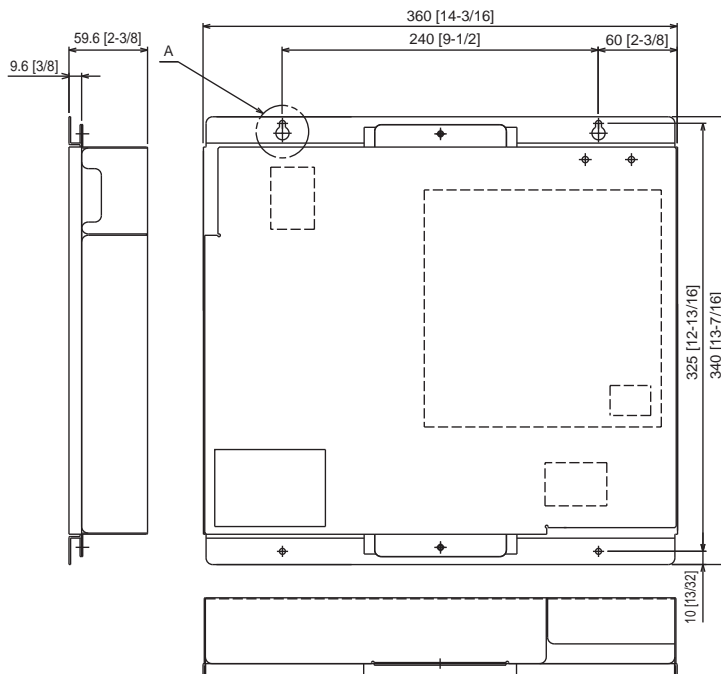

Item		Description
Dimensions		340 (H) x 360 (W) x 59.6 (D) [13-7/16(H) x 14-3/16 (W) x 2-3/8(D)]
Net Weight		3.4 kg (7-1/2 lb)
Power Source		~ 208 - 230V (60 Hz)
Current Consumption		50 mA (Maximum)
Operation Environment	Temperature	Operating Range: -15 to 43°C / 5 to 109°F Storage Range: -20 to 60°C / -4 to 140°F
	Humidity	30 to 95 RH (No condensation)
Installation Environment		In the control box

