



High-Density 2.4/5 GHz 10/11 dBi Ceiling-Mount Antenna With N-Style Jack Connector

SPECIFICATIONS


Specifications- SKU# 567653		
Model	M6100110MP1D41806	
Frequency Range	2400-2500 MHz	5150-5850 MHz
Bandwidth	100 MHz	700 MHz
Gain	10 dBi	11 dBi
Vertical Beamwidth	28°	18°
Horizontal Beamwidth	40°	24°
VSWR	≤1.8	
Front to Back Ratio	≥25 dB	
Isolation	≥30 dB	
Nominal Impedance	50 Ohm	
Polarization	Vertical/Horizontal	
Maximum Power	20 W	
Wind Rating	123 mph	
Connector Type	N-Style Jack	
Dimension	10.3"x 10.3"x 1.4"	
Weight	4.4 lbs.	
Mast Diameter	1.57" - 1.97"	




2.4 GHz: H-Plane



2.4 GHz: E-Plane



5 GHz: H-Plane

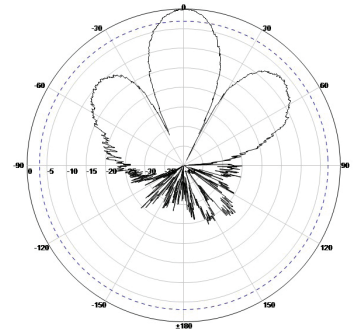

5 GHz: E-Plane

High-Density 2.4/5 GHz 10/11 dBi Ceiling-Mount Antenna With N-Style Jack Connector

MOUNTING INSTRUCTIONS



Figure 1



Figure 2



Figure 2a (Close-Up)



Figure 3

1. Drill 1" hole in ceiling tile (*See Figure 1*).
2. Pull leads through drilled hole and ensure antenna is flush against ceiling tile (*See Figure 2*).
3. Tighten screw mount until antenna is securely fastened (*See Figure 3*).
4. Insert ceiling tile into grid.