


Job Name:

System Reference:

Date:

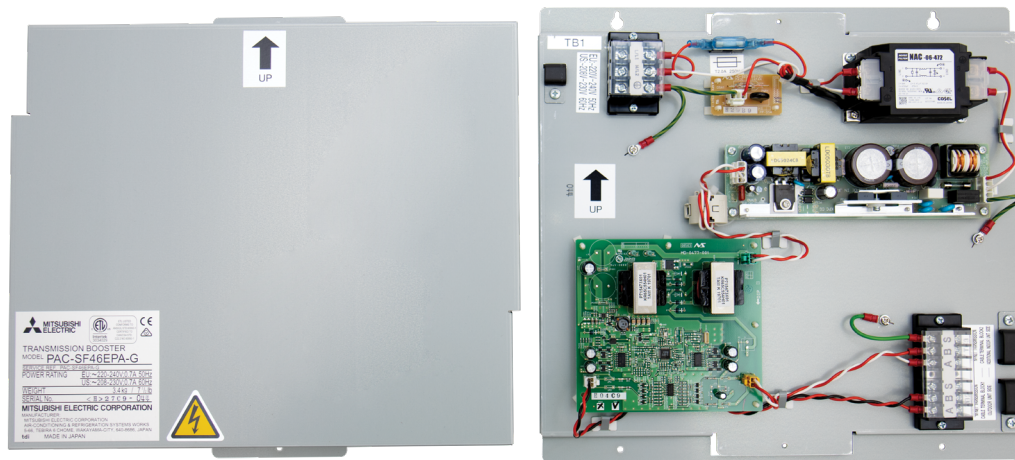

TRANSMISSION BOOSTER [PAC-SF46EPA-G]

RoHS2 certified

The Outdoor unit supplies transmission power 30VDC for the indoor-outdoor transmission line at its connector TB3 and TB7.

The power is consumed by the Indoor unit, ME remote controller, and System controllers.

When the total quantity of Indoor units, and ME remote controller, and equivalent number of units is over 40, or when transmission power supply is not enough, the transmission booster PAC-SF46EPA-G should be designed into the air-conditioner system to ensure the system communication.

Designing PAC-SF46EPA-G into an air-conditioner system.

Taking the power consumption of Indoor unit as 1, the equivalent power consumption or supply of others are listed at Table 1 and Table 2.

Table 1 The equivalent power consumption and the equivalent number of units

Category	Model	The equivalent power consumption	The equivalent number of units	
Indoor unit	Sized P05-P96, PEFY-AF1200CFM-E	1	1	
	PEFY-AF1200CFMR-E	2	2	
BC controller	CMB	2	1	
PWFY *1	P36NMU-E-BU	6	1	
	P36NMU-E2-AU	1	1	
	P72NMU-E2-AU	5	1	
MA remote controller/Lossnay	PAR-CT01MAU	0	0	
	PAR-40MAAU			
	PAC-YT53CRAU			
	PAR-FA32MA			
	LGH-F-RXV			
	PZ-61DR-E PZ-43SMF-E			
ME remote controller	PAR-U01MEDU	0.5	1	
System controller	AE-200A AE-50A EW-50A LMAP	0	0	
	AG-150A-A EB-50GU-A PAC-IF01AHC-J	0.5	1	
	TC-24B	1.5	5	
	PAC-YG60MCA PAC-YG66DCA PAC-YG63MCA	0.25	1	
	ON/OFF controller	PAC-YT40ANRA	1	1
	MN converter	CMS-MNG-E	2	1
PAC-USCMS-MN-1		0.5	1	
Outdoor/Heat source unit	TB7 power consumption	0	0	
System control interface	MAC-334IF-E	0	0	
A-M converter	PAC-IF01MNT-E	1	2	

*1 PWFY cannot be connected to PUMY model.

Model: PAC-SF46EPA-G Transmission Booster

Table 2 The equivalent power supply

Category	Model	The equivalent power supply		
Transmission Booster	PAC-SF46EPA-G	25 *1	25 *1	25 *1
Power supply unit	PAC-SC51KUA	5	5	5
Expansion controller	PAC-YG50ECA	6	6	6
BM ADAPTER	BAC-HD150	6	6	6
System controller	AE-200A/AE-50A	0.75	0.75	0.75
	EW-50A	1.5	1.5	1.5
	LM-AP	0	0	0
		TB3 and TB7 total	TB7 only	TB3 only
Outdoor/Heat source unit	Outdoor unit other than the following units *2	32 *1	6	32*1 - equivalent power supplied to TB7
	S-Series outdoor unit	12 *1	0	12 *1
	TLMU/TKMU outdoor unit	32 *1	- *3	32 *1

*1 When one or more indoor units listed below is connected, subtract 3 from the equivalent power supply.

*2 If PAC-SC51KUA is used to supply power at TB7 side, no power supply need from Outdoor/Heat source unit at TB7, Connector TB3 itself will therefore have 32.

Table 3

Category	Model
Indoor unit	Sized P72, P96 PEFY-AF1200CFM(R)-E

With the equivalent power consumption values and the equivalent number of units in Table 1 and Table 2, PAC-SF46EPA-G can be designed into the air-conditioner system to ensure proper system communication according to (A), (B), (C).

(A) Firstly, count from TB3 at TB3 side the total equivalent number of units of Indoor units, ME remote controller, and System controllers. If the total equivalent number of units reaches 40, a PAC-SF46EPA-G should be set.

(B) Secondly, count from TB7 side to TB3 side the total transmission power consumption. If the total equivalent power supply reaches 32, a PAC-SF46EPA-G should be set. Yet, if a PAC-SC51KUA or another controller with a built-in power supply, such as PAC-YG50ECA, is used to supply power at TB7 side, count from TB3 side only.

(C) Thirdly, count from TB7 at TB7 side the total transmission power consumption, If the total equivalent power supply for only TB7 reaches 6, a PAC-SF46EPA-G should be set. Also, count from TB7 at TB7 side the total equivalent number of units of System controllers, and so on. If the total equivalent number of units reaches 40, a PAC-SF46EPA-G should be set.


* The equivalent power supply of S-Series outdoor unit is 12.

* When one or more indoor units listed in Table 3 is connected, subtract 3 from the equivalent power supply.

Model: PAC-SF46EPA-G Transmission Booster

EXTERNAL DIMENSION

Unit: mm [in.]

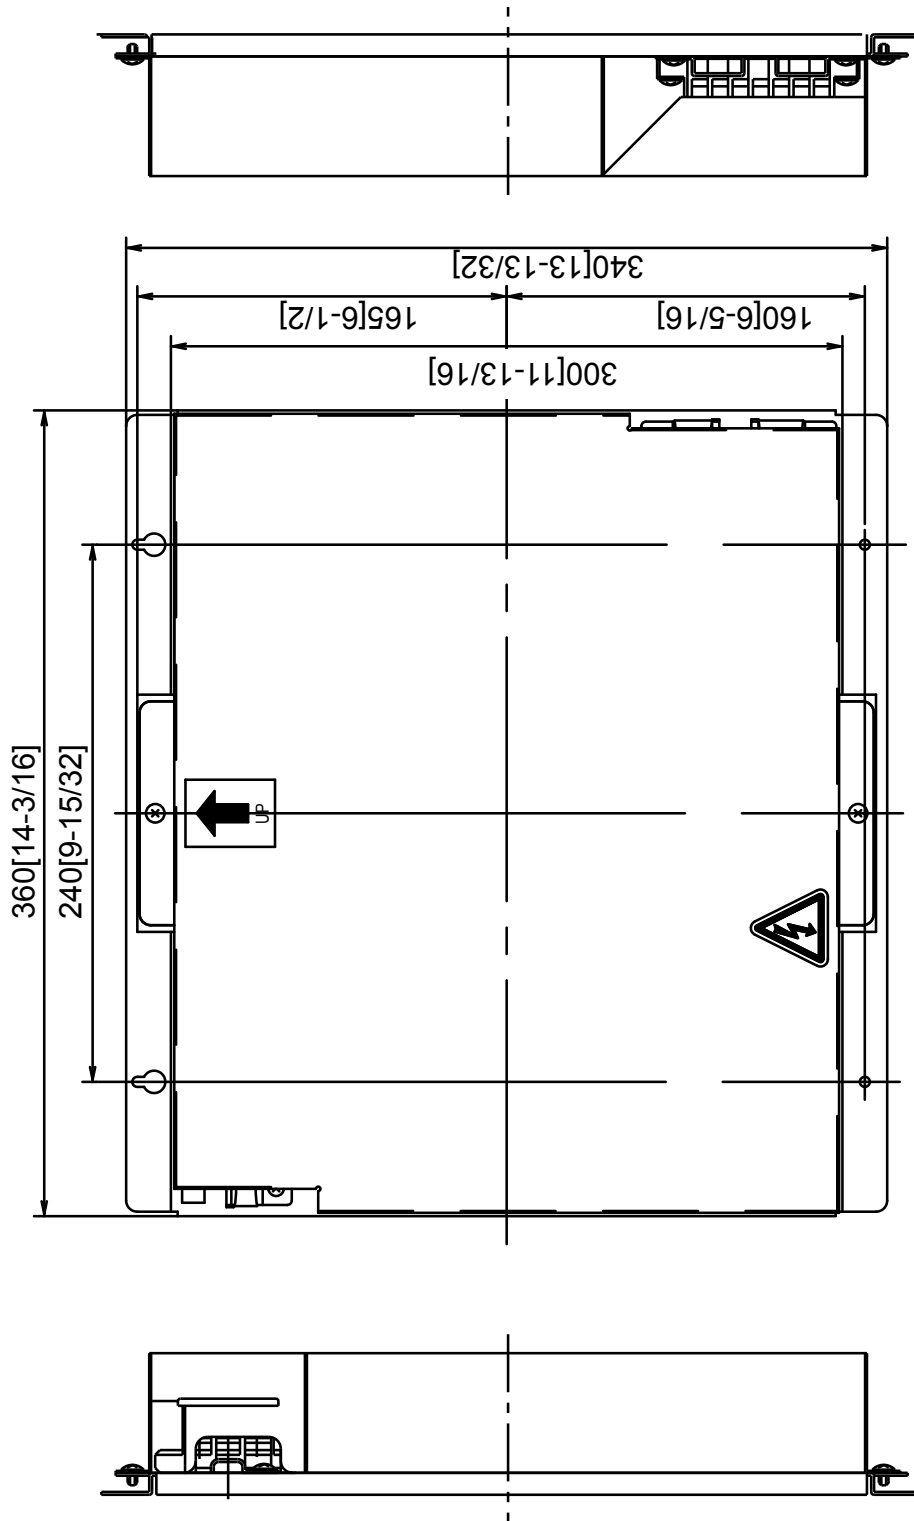

1340 Satellite Boulevard, Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com