



# VIVE SUBMITTAL SHEET

Job Name: \_\_\_\_\_ Location: \_\_\_\_\_ Date: \_\_\_\_\_


Purchaser: \_\_\_\_\_ Installer: \_\_\_\_\_

Submitted to: \_\_\_\_\_ For:  RNC  R&R  Commercial

## MODEL TP-S-701i

### Single Stage - WIFI

1 Heat, 1 Cool  
Hardwire Only  
Programmable Through App

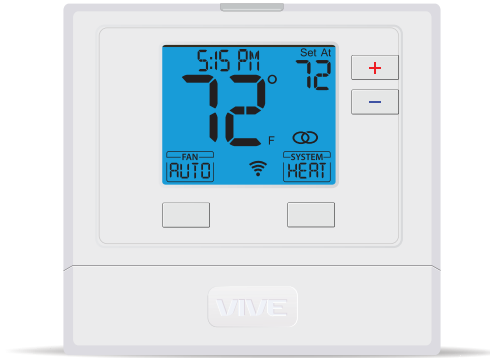

### This model features:

- 4 sq. inch display
- Blue backlight
- Glow in the dark light button
- Universal subbase
- Simple private label badge system
- Hardwire Only
- 5 Year Warranty
- 5 minute compressor delay protection (selectable on or off)
- Separate heating and cooling swing (cycle rate) adjustments

### Specifications:

Application	1 heat, 1 cool
Programmability	Programmable Through App
Display Range	41°F to 95°F (5°C to 35°C)
Control Range	44°F to 90°F (7°C to 32°C)
Display Accuracy	+/- 1°F
Heat Swing	Adjustable from 0.2°F to 2.0°F
Cool Swing	Adjustable from 0.2°F to 2.0°F
Terminals	Rc, Rh, G, Y, C, O, B, W
Load Rating	1 amp per terminal, 1.5 amp maximum all terminals combined
Power Source	18 to 30 VAC, NEC Class II, 50/60 Hz for hardwire (common wire)
Operating Ambient	32°F to +105°F (0°C to +41°C)
Operating Humidity	90% non-condensing maximum
Mounting	Wall or Junction Box
Dimensions	4.7"W x 4.4"H x 1"D (119mm W x 112mm H x 25mm D)
Warranty	5 year warranty