

Solve Complex Comfort Challenges.

RedLINK™ Technology





RedLINK™
Technology

Complete. Connected. Control.

A home's indoor environment is made up of different areas that can have very different comfort challenges. While some rooms may be too dry, others may be too damp. Some may always be chilly, and others always warm. Whole-home comfort can be tough, both to sell and install.

Honeywell's suite of solutions with RedLINK™ Technology can help contractors solve home comfort challenges wirelessly, without running new wires or breaking through walls.

Your customers get complete control of their heating and cooling systems while you enjoy simple installations, increased add-on sales and a boost to your bottom line.

With RedLINK Technology, Honeywell gives you customizable solutions that fit the lifestyle of your customers and can grow with their changing needs.

Helping Homes Be Well.

Honeywell Whole-Home Comfort Solutions is an integrated portfolio of industry-leading products that help solve comfort and air quality issues throughout the home.

By recommending the right combination of products to solve humidity, ventilation, air cleaning and zoning issues, you can help customers be happier and more comfortable in their homes.


And when you build Whole-Home Comfort solutions around RedLINK Technology, you're helping your customers make the most of their homes by taking control and staying connected.

Don't Just Connect. Total Connect.

Once registered, your customers can customize their system and alert settings, download free mobile apps and more at mytotalconnectcomfort.com.

The Total Connect Comfort app enables users to:

- View and change their HVAC system settings (Heat, Cool, Off, Fan, Auto, EM Heat, Dehumidifier, Humidifier).
- View and set the temperature.
- View indoor humidity.
- View outdoor temperature and humidity¹.
- Access multiple thermostats if the system is zoned.
- Access multiple locations if more than one system is connected.
- Receive temperature and humidity alerts via e-mail.
- Access over 90 system alerts via the web.
- Get automatic upgrades as new features are available.

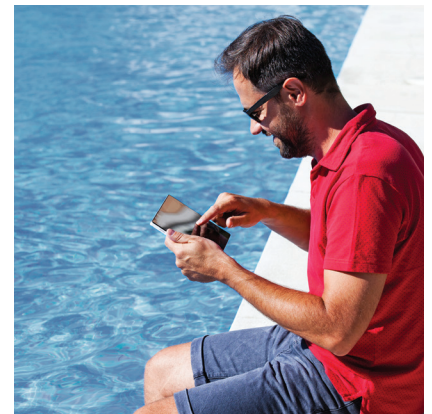

The Total Connect Comfort app is ideal for anyone with a smartphone, vacation home, investment property, or business.



Group Scheduling allows property managers to modify set points and schedules across all their connected thermostats at once.

¹Outdoor air sensor required

Comfort and Connection - At a Whole New Level.

Prestige® IAQ

Clean Design Meets Clear Sales Potential

The satisfaction your customers get from the comfort of experiencing the sleek design and straightforward functionalities of the Prestige thermostat will bring them back to your business for all their HVAC needs.

Delta T* Diagnostics and Alerts

Based on limits set at installation, your customers can be alerted with instructions to contact you for assistance when their system does not operate as expected. Alerts give customers a sense of security while the data logs for those alerts, as well as user interaction and system performance enable you to service or replace the equipment prior to a loss of heating or cooling.

*All Prestige IAQ systems come standard with a return and a discharge air temperature sensor to measure Delta T.



One Control is Always the Right Control

Now with selectable residential or commercial functionality, advanced staging control options, and assignable input and output relays, Prestige offers you the flexibility to use one thermostat in virtually every application.

Alerts and Interaction Logs

A searchable history of alerts and setting changes let you know if there is a system malfunction or if the issue was caused by user error.

Customizable Service Reminders

Remind your customers when it's time to call you for service, when their warranty is expiring, or customize your own alerts.


RedLINK Wireless Comfort Systems



Wireless FocusPRO™

Thermostats

Wireless FocusPRO thermostats go anywhere and solve any problem. Now you can easily relocate a thermostat to a more suitable location, install multi-stage equipment, cool retrofits when wires are not available, or add zoning.



EConnect™

Wireless Thermostats for Electric Heat

Thanks to RedLINK communication and the simple wiring of an Equipment Interface Module your customers can experience the comfort they want controlled from a wireless thermostat located exactly where they want it.



TrueZONE™

Wireless Zoning Systems

When used with our RedLINK-enabled TrueZONE panels, the Honeywell Wireless Adapter lets you add zoning to any home or more zones to an existing system.

Connect to More Sales with Accessories

RedLINK accessories give your customers the option of customizing their system to achieve their control, comfort and convenience needs. With installation that requires no more than a few minutes and the touch of a button, RedLINK offers you the opportunity to increase profitability through add-on sales.




Equipment Remote Module

Lets control devices communicate wirelessly with outdoor two-stage compressors, heat pumps or an indoor boiler.



Wireless Outdoor Air Sensor

Installed on the exterior of a home or building, the sensor will display the outdoor temperature and humidity on all RedLINK thermostats and the Portable Comfort Control.



Wireless Entry / Exit Remote

Easily manage your comfort and energy consumption by controlling your thermostat from anywhere in the home or building.



RedLINK Internet Gateway

Connect to any wireless-enabled thermostat to access Total Connect Comfort Services.



Wireless Indoor Air Sensor

When paired with a Prestige IAQ thermostat the Wireless Indoor Sensor enables customers to change the sensing location of the thermostat, average temperature in large rooms or monitor humidity.



Wireless Vent and Filter Boost Remote






One-touch 20-40-60 minute timed ventilation and filtration boosts for the home. Compatible with all equipment and air cleaners controlled by a RedLINK thermostat.





Portable Comfort Control™

Gives customers freedom to make adjustments everywhere in the system from anywhere in the conditioned space.



Prestige Comfort Systems Selection Guide

	Model Number	Kit Includes	Stages (Dedicated Terminals)	Common Features	Wiring Terminals	Adding Wiring Terminals When Used with an EIM			
Prestige IAQ Kits	 YTHX9421R5085	Prestige IAQ System Kit Including: Prestige IAQ HD Thermostat, Equipment Interface Module (EIM), and Two Duct Sensors for Alerts and Diagnostics.	Up to 4H/2C Heat Pump & 3H/2C Conventional (Up to 4 Cool Conventional using the universal outputs [commercial only.] Up to 2 stages of Geothermal Radiant Heat using the universal outputs.)	Equipment <ul style="list-style-type: none"> Heat Pump (Geothermal and Air-to-Air) Forced Warm Air Hot Water Steam / Gravity Commercial VisionPRO Only: <ul style="list-style-type: none"> Only Allows Temporary Setpoint Adjustments to Conserve Energy Keypad Lockout Initiate Occupancy Connect to the Internet (THM6000R1002) Required Remote Setback Using an Occupancy Sensor (THM5421R1021) Equipment Interface Module Required Pre-occupancy Purge Programmable Fan Vacation Hold All Models: <ul style="list-style-type: none"> Economizer / Time of Day Commercial Dehumidification Options 365 day Holiday Calendar (Preloaded and up to 25 Customer Events) 	Power Supply 24 VAC RedLINK Accessories <ul style="list-style-type: none"> Displays Outdoor Temperature and Humidity - Wireless Outdoor Air Sensor (C7089R1013) Required Temperature Control on Demand - Portable Comfort Control (REM5000R1001) Required Connecting a Condensing Unit or Boiler to Control Devices - Without Wires - Equipment Remote Module (ERM5220R1018) Required Remote Indoor Temperature and Humidity Sensing - Wireless Indoor Air Sensor (C7189R1004) Required Connect to the Internet - RedLINK Internet Gateway (THM6000R1002) Required 	<ul style="list-style-type: none"> One-touch Setback and Recovery - Entry / Exit Remote (REM1000R1003) Required 20-40-60 Minute Timed Ventilation Boost - Vent and Filter Boost Remote (HVC20A1000) Required Extend Wireless Range - Wireless Adapter (THM4000R1000) Commercial Use (Prestige IAQ Only) Programming <ul style="list-style-type: none"> 7-Day Programmable or Non-Programmable Residential or Commercial Programmable Fan Vacations Display <ul style="list-style-type: none"> HD Color Touchscreen User Interface 8 sq. in. Display Size (Viewable) On-Screen Help Backlighting - Continuous or On-Demand 	<ul style="list-style-type: none"> Simultaneous Display of Room and Set Temperatures Real-Time Clock Language Options Interview-Based Programming and Installer Setup USB Port for Uploading Logo and Preset Installer Setup Control <ul style="list-style-type: none"> Fan Circulation Configurable Staging IAQ Control and Configurable Outputs Wired Sensor Inputs Permanent Memory Retention Auto or Manual Changeover Adaptive Intelligent Recovery™ Temperature Setpoint Limits Keypad Lockout Advanced Dual-Fuel Heat Pump Operation Limited Warranty 5 Year	Prestige IAQ - R, C Equipment Interface Module - R, C, W-O/B, W2/AUX1, W3/AUX2, Y, Y2, G, A-L/A, U1, U1, U2, U2, U3, U3, RH, RC, R, C, S1, S1, S2, S2, S3, S3, S4, S4	
	 YTHX9421R5101	Prestige IAQ System Kit Including: Prestige IAQ HD Thermostat, Equipment Interface Module (EIM), Wireless Outdoor Temperature Sensor, and Two Duct Sensors for Alerts and Diagnostics.							
VisionPRO	 TH8110R1008	RedLINK VisionPRO	1 Heat / 1 Cool*	Application <ul style="list-style-type: none"> Stages - Up to 3H / 2C Heat Pump or 2H / 2C Conventional Gas, Oil or Electric Heat Pump Forced Warm Air Hot Water Steam / Gravity Power Method <ul style="list-style-type: none"> Equipment Interface Module - Hardwired FocusPRO - Battery 	Temperature Control on Demand - Portable Comfort Control (REM5000R1001) Required Adjust All RedLINK Thermostats from a Single Control	Advanced Dual-Fuel Heat Pump Operation <ul style="list-style-type: none"> Backup Control Private Labeling Available Adaptive Intelligent Recovery, Temperature Setpoint Limits (Programmable Model Only)	Simultaneous Display of Room and Set Temperatures User Interface <ul style="list-style-type: none"> Soft Keys Limited Warranty FocusPRO and Equipment Interface Module - 5 Year	Equipment Interface Module - R, C, W-O/B, W2/AUX1, W3/AUX2, Y, Y2, G, A-L/A, U1, U1, U2, U2, U3, U3, RH, RC, R, C, S1, S1, S2, S2, S3, S3, S4, S4	
	 TH8110R1003	RedLINK VisionPRO	Up to 3 Heat / 2 Cool - Heat Pump Up to 2 Heat / 2 Cool - Conventional*						
	 TH8321R1001	RedLINK VisionPRO	Up to 3 Heat / 2 Cool - Heat Pump Up to 2 Heat / 2 Cool - Conventional*						

Wireless FocusPRO Systems (Non-Zoned)

	Model Number	Kit Includes	Schedule Options			Common Features	Wiring Terminals	
			Program Options	Temporary Override	Permanent Hold			
 YTH6320R1001	Programmable FocusPRO, Equipment Interface Module, and Return Air Sensor	5-1-1 / 5-2 Day	Yes	Yes	Temperature Control on Demand - Portable Comfort Control (REM5000R1001) Required Adjust All RedLINK Thermostats from a Single Control	Advanced Dual-Fuel Heat Pump Operation <ul style="list-style-type: none"> Backup Control Private Labeling Available Adaptive Intelligent Recovery, Temperature Setpoint Limits (Programmable Model Only)	Simultaneous Display of Room and Set Temperatures User Interface <ul style="list-style-type: none"> Soft Keys Limited Warranty FocusPRO and Equipment Interface Module - 5 Year	Equipment Interface Module - C, R, Rc, Rh, W-O/B, W2-Aux/E, Y, Y2, G, L, RAS, RAS
 YTH5320R1000	Non-Programmable FocusPRO, Equipment Interface Module, and Return Air Sensor	N/A						

EConnect Wireless Thermostats for Electric Heat

Model Number	Common Features	Wiring Terminals
 YTL9160AR1000	Equipment <ul style="list-style-type: none"> Baseboard Convactor Fan-Forced Heater Specifications <ul style="list-style-type: none"> Color - Thermostat: White EIM: Comes with White and Light Almond Covers Switching - SPST Switching Method - Relay Maximum Load - 1500 W @ 120 V, 3000 W @ 240 V Minimum Load - 50 W @ 120 V, 100 W @ 240 V Programming Options <ul style="list-style-type: none"> 7-Day / 5-2 Day Energy Aware Temporary Override Permanent Hold Limited Warranty <ul style="list-style-type: none"> 3 Year 	Equipment Interface Module - 3 Wire
 YTA7210-AR-SPK	Power Supply <ul style="list-style-type: none"> Thermostat: 2 AA Batteries, EIM: Hardwire RedLINK Accessories <ul style="list-style-type: none"> Displays Outdoor Temperature only - Wireless Outdoor Air Sensor (C7089R1013) Required Temperature Control on Demand - Portable Comfort Control (REM5000R1001) Required Connect to the Internet - RedLINK Internet Gateway (THM6000R1002) Required One-touch Setback and Recovery - Entry / Exit Remote (REM1000R1003) Required Display <ul style="list-style-type: none"> User Interface: Soft Keys English Display Only 4.53 sq. in. Display Size (Viewable) On Demand Backlighting Control <ul style="list-style-type: none"> Permanent Memory Retention Early Start Temperature Limits Unoccupied Input (Required CT240 or CT241) 15' Floor Temperature Sensor 	

Learn More

Ask your Honeywell representative or visit ForwardThinking.Honeywell.com for more details about RedLINK™ Technology.

Home and Building Technologies

715 Peachtree Street NE
Atlanta, GA 30308
honeywell.com

03-00397 | SCH | 10/17
© 2017 Honeywell International Inc.

Honeywell